
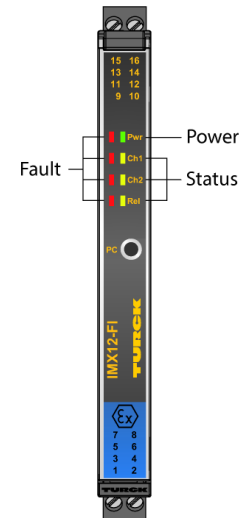


**Frequency Transducer/Pulse Counter
1-channel
IMX12-FI01-1SF-111R- C0/24VDC**

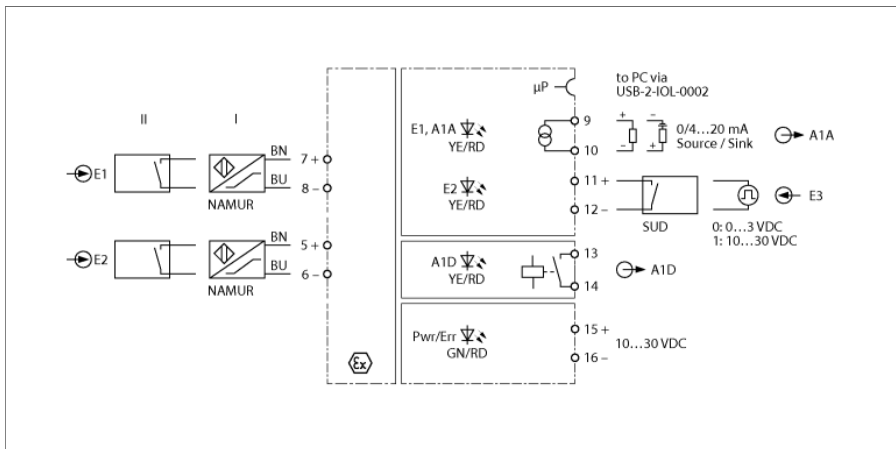

The frequency transducer/pulse counter IMX12-FI01-1SF-111R-C0/24VDC is equipped with intrinsically safe input circuits and transmits frequency signals up to 20,000 Hz electrically isolated from the at-risk area to the safe area. In addition, limits, slip or clockwise/counter-clockwise rotation can be monitored. The devices are suitable for operation in zone 2.

The 2-channel device is equipped with two intrinsically safe inputs for the connection of sensors acc. to EN 60947-5-6 (NAMUR) or potential-free contacts. A current output (0/4...20 mA) and an NO relay are available on the output side.

The device is parameterized via FDT and IODD with a PC. The current output can be set to 0/4...20 mA (source or sink optional). In accordance with the parameterization (E1, E2, E1-E2 or E2-E1), the input signals are provided as a 0/4...20 mA standard current signal. With the NO relay, either a limit value can be monitored on over/undershoot or a window. The start-up delay SUD is turned on via input E1, E2 or E3.

The devices have a green power LED (Pwr) and a red LED to indicate internal faults. For the input circuit there is a yellow and red status LED available. A fault in the input circuit leads to a flashing red LED according to NE44 and an internal fault to a steady read LED. The fault current can be adjusted to < 3.5 mA or > 21.5 mA. A yellow LED indicates the switching state of the limit value relay. A yellow LED indicates that the start-up delay is turned on.


The device can be used in safety circuits up to SIL2 (high and low demand according to IEC 61508) and meets the requirements of the NE21. It is equipped with removable screw terminals.

- ATEX, IECEx, INMETRO, TR CU, NEPSI
- Installation in zone 2
- SIL 2
- Input circuits monitored for wire-break and short-circuit
- Parametrized via PC
- Complete galvanic isolation
- Removable screw terminals

Frequency Transducer/Pulse Counter
1-channel
IMX12-FI01-1SF-1I1R- C0/24VDC

Type designation	IMX12-FI01-1SF-1I1R- C0/24VDC
Ident no.	7580205
Nominal voltage	24 VDC
Operating voltage range	10...30 VDC
Power consumption	≤ 3 W
Monitoring range/Setting range	≤ 0.0006...1200000 min ⁻¹
NAMUR input	
NAMUR	EN 60947-5-6
No-load voltage	8.2 VDC
Short-circuit current	8.2 mA
Input resistance	1 kΩ
Cable resistance	≤ 50 Ω
Switch-on threshold	1.75 mA
Switch-off threshold	1.55 mA
Wire breakage threshold	≤ 0.06 mA
Short-circuit threshold	≥ 6.4 mA
Output circuits	
Output current	Source/Sink (15...28 V) 0/4...20 mA
Load resistance, current output	≤ 0.8 kΩ
Output circuits (digital)	1 x relay (change-over)
Output switching voltage relay	≤ 30 VDC / ≤ 250 VAC
Switching current per output	≤ 2 A
Switching capacity per output	≤ 500 VA/60 W
Switching frequency	≤ 15 Hz
Contact quality	AgNi
Reference temperature	23 °C
Measuring accuracy current output (including linearity, hysteresis and repeatability)	± 10 μA
Temperature drift	≤ 0.0025 % of final value /K
Galvanic isolation	
Test voltage	2.5 kV
E1,E2-E3	375 V peak value acc. to EN 60079-11
E1,E2 supply voltage	375 V peak value acc. to EN 60079-11
A1A supply voltage	300 V RMS acc. to EN 50178 and EN 61010-1
E3 supply voltage	375 V peak value acc. to EN 60079-11
A1A-A1D	300 V RMS acc. to EN 50178 and EN 61010-1
A1A-E3	300 V RMS acc. to EN 50178 and EN 61010-1
Important note	For Ex-applications the values specified in the corresponding Ex certificates (ATEX, IECEx, UL, etc.) apply.
Ex approval acc. to conformity certificate	TÜV 16 ATEX 192124 X
Application area	II (1) G, II (1) D
Ignition protection category	G [Ex ia Ga] IIC; D [Ex ia Da] IIIC
Application area	II 3 (1) G
Ignition protection type	Ex ec nC [ia Ga] IIC T4 Gc
Important note	If the device is used in applications to achieve functional safety according to IEC 61508, the safety manual must be used. Information in the data sheet are not valid for functional safety.
Use in SIL safety circuits	SIL 2 acc. to IEC 61508
Indication	
Operational readiness	green
Switching state	Yellow
Error indication	red

Dimensions

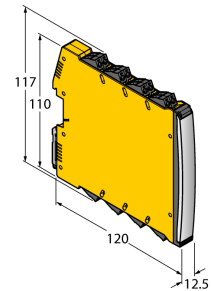

Frequency Transducer/Pulse Counter
1-channel
IMX12-FI01-1SF-1I1R- C0/24VDC

Protection class	IP20																																																																																
Flammability class acc. to UL 94	V-0																																																																																
Ambient temperature	-25...+70 °C																																																																																
Storage temperature	-40...+80 °C																																																																																
Relative humidity	≤ 95 %																																																																																
Dimensions	120 x 12.5 x 117 mm																																																																																
Weight	169 g																																																																																
Mounting instructions	DIN rail (NS35)																																																																																
Housing material	Polycarbonate/ABS																																																																																
Electrical connection	Removable screw clamp terminals, 2-pin																																																																																
Terminal cross-section	0.2...2.5 mm ² (24 ... 13 AWG)																																																																																
Tightening torque	0.5 Nm																																																																																
Tightening torque	4.43 LBS-Inch																																																																																
Environmental conditions	<table border="1"> <tr> <td>Operating altitude</td> <td>Up to 2000 m above sea level</td> </tr> <tr> <td>Pollution degree</td> <td>II</td> </tr> <tr> <td>Surge category</td> <td>II (EN 61010-1)</td> </tr> <tr> <td>Standards used</td> <td></td> </tr> <tr> <td>Voltage resistance and insulation</td> <td></td> </tr> <tr> <td></td> <td>EN 50178</td> </tr> <tr> <td></td> <td>EN 61010-1</td> </tr> <tr> <td></td> <td>EN 50155</td> </tr> <tr> <td></td> <td>GL VI-7-2</td> </tr> <tr> <td>Shock</td> <td></td> </tr> <tr> <td></td> <td>EN 61373 class B</td> </tr> <tr> <td></td> <td>EN 50155</td> </tr> <tr> <td></td> <td>GL VI-7-2</td> </tr> <tr> <td></td> <td>EN 60068-2-6</td> </tr> <tr> <td></td> <td>EN 60068-2-27</td> </tr> <tr> <td>Temperature</td> <td></td> </tr> <tr> <td></td> <td>EN 60068-2-1 Ad</td> </tr> <tr> <td></td> <td>EN 50155</td> </tr> <tr> <td></td> <td>GL VI-7-2</td> </tr> <tr> <td></td> <td>EN 60068-2-2 Bd</td> </tr> <tr> <td></td> <td>EN 60068-2-1</td> </tr> <tr> <td>Humidity</td> <td></td> </tr> <tr> <td></td> <td>EN 60068-2-38</td> </tr> <tr> <td>EMC</td> <td></td> </tr> <tr> <td></td> <td>EN 50155</td> </tr> <tr> <td></td> <td>GL VI-7-2</td> </tr> <tr> <td></td> <td>NE21</td> </tr> <tr> <td></td> <td>EN 61326-1</td> </tr> <tr> <td></td> <td>EN 61326-3-1</td> </tr> <tr> <td></td> <td>EN 61000-4-2</td> </tr> <tr> <td></td> <td>EN 61000-4-3</td> </tr> <tr> <td></td> <td>EN 61000-4-4</td> </tr> <tr> <td></td> <td>EN 61000-4-5</td> </tr> <tr> <td></td> <td>EN 61000-4-6</td> </tr> <tr> <td></td> <td>EN 61000-4-11</td> </tr> <tr> <td></td> <td>EN 61000-4-29</td> </tr> <tr> <td></td> <td>EN 55011</td> </tr> <tr> <td></td> <td>EN 55016</td> </tr> <tr> <td></td> <td>EN 50121-3-2</td> </tr> <tr> <td></td> <td>EN 61000-6-2</td> </tr> </table>	Operating altitude	Up to 2000 m above sea level	Pollution degree	II	Surge category	II (EN 61010-1)	Standards used		Voltage resistance and insulation			EN 50178		EN 61010-1		EN 50155		GL VI-7-2	Shock			EN 61373 class B		EN 50155		GL VI-7-2		EN 60068-2-6		EN 60068-2-27	Temperature			EN 60068-2-1 Ad		EN 50155		GL VI-7-2		EN 60068-2-2 Bd		EN 60068-2-1	Humidity			EN 60068-2-38	EMC			EN 50155		GL VI-7-2		NE21		EN 61326-1		EN 61326-3-1		EN 61000-4-2		EN 61000-4-3		EN 61000-4-4		EN 61000-4-5		EN 61000-4-6		EN 61000-4-11		EN 61000-4-29		EN 55011		EN 55016		EN 50121-3-2		EN 61000-6-2
Operating altitude	Up to 2000 m above sea level																																																																																
Pollution degree	II																																																																																
Surge category	II (EN 61010-1)																																																																																
Standards used																																																																																	
Voltage resistance and insulation																																																																																	
	EN 50178																																																																																
	EN 61010-1																																																																																
	EN 50155																																																																																
	GL VI-7-2																																																																																
Shock																																																																																	
	EN 61373 class B																																																																																
	EN 50155																																																																																
	GL VI-7-2																																																																																
	EN 60068-2-6																																																																																
	EN 60068-2-27																																																																																
Temperature																																																																																	
	EN 60068-2-1 Ad																																																																																
	EN 50155																																																																																
	GL VI-7-2																																																																																
	EN 60068-2-2 Bd																																																																																
	EN 60068-2-1																																																																																
Humidity																																																																																	
	EN 60068-2-38																																																																																
EMC																																																																																	
	EN 50155																																																																																
	GL VI-7-2																																																																																
	NE21																																																																																
	EN 61326-1																																																																																
	EN 61326-3-1																																																																																
	EN 61000-4-2																																																																																
	EN 61000-4-3																																																																																
	EN 61000-4-4																																																																																
	EN 61000-4-5																																																																																
	EN 61000-4-6																																																																																
	EN 61000-4-11																																																																																
	EN 61000-4-29																																																																																
	EN 55011																																																																																
	EN 55016																																																																																
	EN 50121-3-2																																																																																
	EN 61000-6-2																																																																																

Accessories

Type code	Ident no.	Description
USB-2-IOL-0002	6825482	IO-Link Master with integrated USB port
IOL-COM/3M	7525110	The communication line IOL-PROG/3M connects IO-Link devices to an IO-Link master via a 3.5 mm jack plug.

